

SANPO

Leading to the smarter flow

We Trust Our Service
Can Fulfill Your Needs**SANPO**

Leading to the smarter flow

We Trust Our Service
Can Fulfill Your Needs**SANPO**

Leading to the smarter flow

We Trust Our Service
Can Fulfill Your Needs

GATE VALVES

Diameter: DN50-1200
 Pressure: PN10/16,200PSI/300PSI,JIS10K
 Temperature: 0~80°C
 Medium: Water,Gas,etc.
 Mody Material: GGG50/40
 Connection: Flange
 Standard: GB 24924,DIN3352, BS5163, AWWAC515



AIRVENT VALVES

Pressure: PN10,PN16,PN25
 Pressure: DN15-DN300mm
 Body Material: Ductile Iron
 Connection: Threaded, Flange
 Temperature: -20°C~120°C



CAST STEEL / STAINLESS STEEL VALVES

Type: Gate Valve,Check Valve,Ball Valve
 Size Range: 2~32"(DN50~DN800)
 Pressure: PN10-PN100,Class 150-Class 900,
 Jis5K-20K
 Body Materials: WCB,Stainless Steel

Applicable Temperature: 425°C
 Applicable Media: Water,Oil,Gas
 Connecting Type: Flange
 Operate: Manual,Worm Gear,Pneumatic,
 Electric-Motorized



BUTTERFLY VALVES

Size Range: 2~32"(DN50~DN800)
 Pressure: PN10-PN16 ,Class 150-Class
 JIS5K-20K
 Body Materials: WCB,Stainless Steel,Cast Iron
 Ductile Iron

Seat Material : NBR,EPDM,VITON,PTFE
 End Connection : Wafer ,Flange , Lug ,Groove
 Stem Materials : 45#,SS416,SS304,SS316



LEVEL

Size Range : 1"~3"NPT
 Length : 500~1500mm
 Connection : Threaded , Flange
 Material : SS316 , SS304 , PVC
 Frequency Range : 500MHz~1.8GHz
 Output : 4~20mA / HART
 Remote Type : Up to 10m cable



CHECK VALVES

Model: DN50-600
 Pressure: PN10/16,125LB,150LB,10K
 Temperature: Water,Oil
 Body: Cast Iron,Ductile Iron, Carbon steel,
 Stainless Steel
 Connection: Flange



Y STRAINER

Size Range: DN15~500
 Pressure: PN10,PN16,125LB,10K
 Body Materials: Cast Iron, Ductile Iron, Carbon Steel,
 Stainless Steel
 Screen Materials: SS304,316
 End Connection: Flange




BALL VALVES

Type: one piece,two piece,three piece,three way
 Size Range: 1/4"~32"(DN50~DN800)
 Pressure: PN10-PN100,Class150-Class1500
 Body Materials: WCB,Stainless Steel
 Applicable Temperature: ,425°C
 Applicable Media: Water,Oil,Gas
 Connecting Type: Threaded,Flange,Welding
 Operating: Manual, Worm Gear, Pneumatic,
 Electric-Motorized



THREADED VALVES

Type: Gate Valve,Globe Valve,Check Valve,Ball Valve,Strainer,
 Air Valve
 Size Range: 1/4"-4"(DN10-DN100)
 Pressure: 1000WOG,2000WOG
 Body Materials: WCB,Stainless Steel
 Applicable Temperature: ,425°C
 Applicable Media: Water,Oil,Gas
 Connecting Type: Threaded
 Operate: Handle,Pneumatic,Electric-Motorized

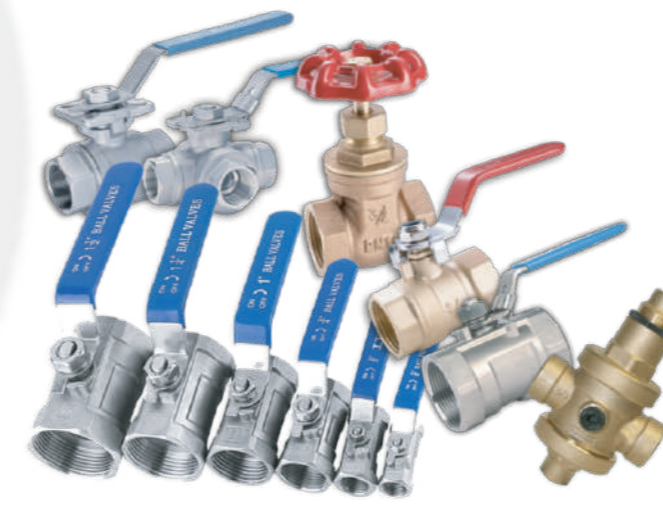

JOINTS

Size: DN40-DN800
 Sleeve: Steel/Ductile Iron
 End Ring: Ductile Iron GGG450-10
 Bolt And Nut: Steel 8.8 Dacromet/Zinced
 Gasket: EPDM/NBR
 Coating: FBE/Rilsan Nylon
 Standard: ISO2531,EN545
 Pipe: PVC Pipe/PE Pipe/Ductile Iron Pipe/Steel Pipe



WATER METERS

Material: Gray Iron,Ductile Iron,Brass
 Standard: ISO4064
 Type: Bry-dial(or wet),Single or multiple flow,Cold or Hot water,
 Belt transmission or not
 Model: LXSG,LXLC,LXXG,LXRG,LXDG,LXF,LXSY,LXH
 Connection: Threaded,Flange

